

Zebra: ZD621R: Calibrate from Printer's Interface

ATTENTION: We suggest **first** performing the calibration from the website. If the calibration fails, then follow these steps.

Step 1: Media Calibration


First, make sure media is properly loaded, the printer cover is closed, and printer power is ON.

To perform a Media Calibration, press and hold PAUSE + CANCEL buttons for two seconds.




Step 2: RFID Calibration


From the printer's Home screen, press the **Menu** button:

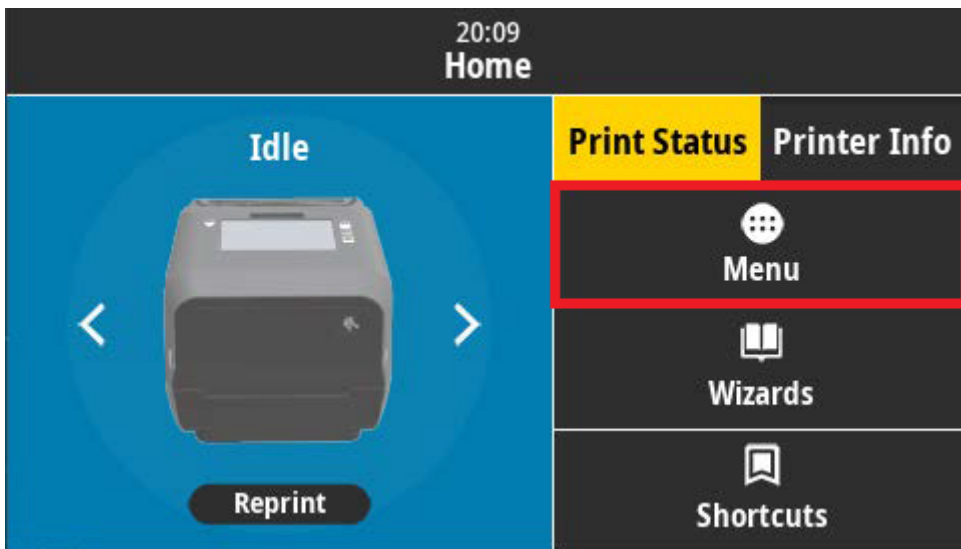


Next, tap the **RFID icon** on the right side of the screen, then tap the **RFID** menu option:

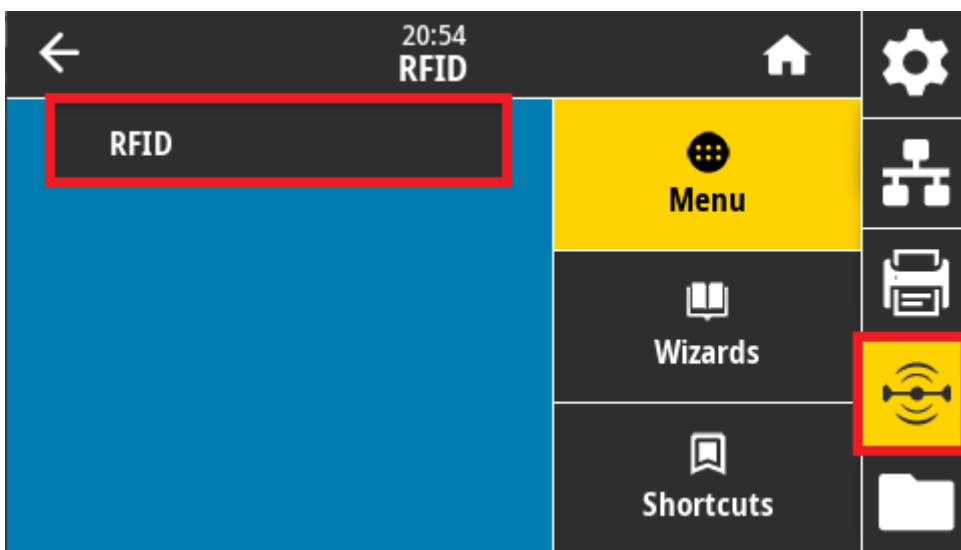

Tap **RFID Calibrate**:

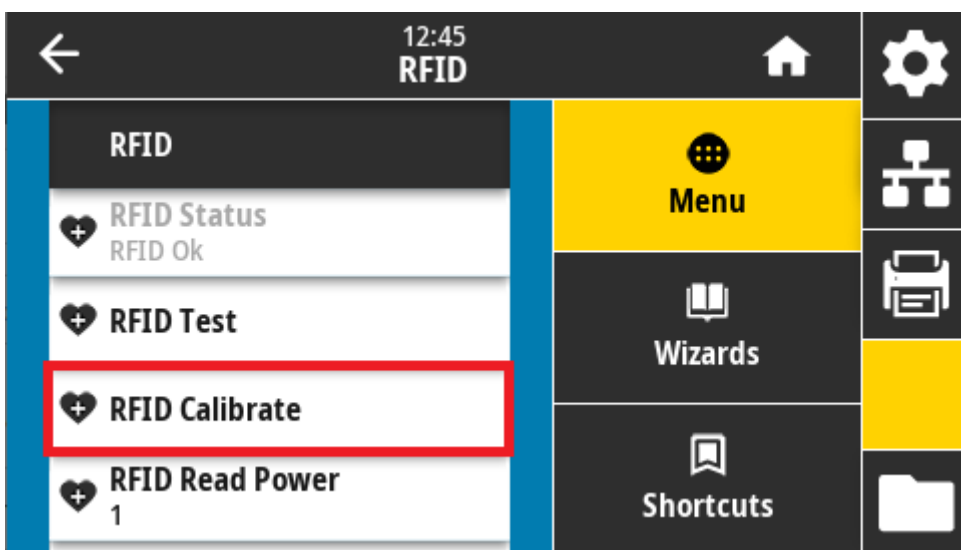

Last, tap **Start Calibration** to perform the RFID calibration:

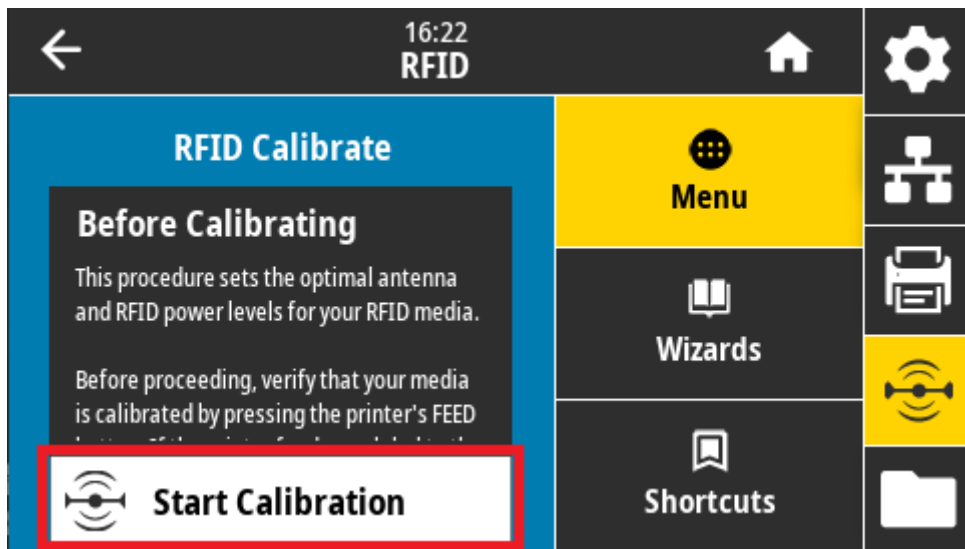

Revision #7

Created 15 May 2025 17:30:29 by John LeBaron

Updated 2 July 2026 02:17:55 by Stan Andrus